


# NAIS

## GU (General Use) Type SOP Series Multi-function (1a,2a MOSFET & optocoupler) 16 Pin Type



# PhotoMOS RELAYS

2 MOSFET Relay and  
1 optocoupler type




mm inch

1 MOSFET Relay and  
2 optocouplers type



Relay portion  
(2,3,14,15,16 pins)  
Detector portion  
(4,5,11,12,13 pins)  
Detector portion  
(6,7,9,10 pins)



Relay portion  
(2,3,14,15,16 pins)  
Detector portion  
(4,5,11,12 pins)  
Detector portion  
(6,7,9,10 pins)

## FEATURES

### 1. SO package 16-Pin type in super miniature design

The device comes in a super-miniature SO package 16-Pin type measuring (W)4.4 × (L)10.37 × (H) 2.1mm (W).173 × (L).408 × (H).083inch

### 2. Ideal for PC card and Fax/Modem applications

The small size provides additional space for increased functionality. The new device has been specifically designed for the PCMCIA embedded and handheld device markets.

### 3. Tape and reel

The device comes standard in a tape and reel (1,000 pcs./reel) to facilitate automatic insertion machines.

## TYPICAL APPLICATIONS

- PCMCIA Modem card (Data/fax modem)
- Laptop and notebook computers
- PDA's
- Mobile computing equipment
- Medical equipment
- Security systems
- Meters (Water, Gas, Vending machine)

## TYPES

| 1 optocoupler type | Output rating* |              | Part No.                                 |   | Packing quantity in tape and reel |
|--------------------|----------------|--------------|--|---|-----------------------------------|
|                    | Load voltage   | Load current | Picked from the 1/2/3/4/5/6/7/8-pin side | Picked from the 9/10/11/12/13/14/15/16-pin side |                                   |
| AC/DC type         | 350 V          | 100 mA       | AQS210TSX                                | AQS210TSZ                                       | 1,000 pcs.                        |

| 2 optocouplers type | Output rating* |              | Part No.                                 |   | Packing quantity in tape and reel |
|---------------------|----------------|--------------|--|---|-----------------------------------|
|                     | Load voltage   | Load current | Picked from the 1/2/3/4/5/6/7/8-pin side | Picked from the 9/10/11/12/13/14/15/16-pin side |                                   |
| AC/DC type          | 350 V          | 120 mA       | AQS210T2SX                               | AQS210T2SZ                                      | 1,000 pcs.                        |

\* Indicate the peak AC and DC values.

Notes: (1) Tape package is the standard packing style. Also available in tube. (Part No. suffix "X" or "Z" is not needed when ordering; Tube: 50 pcs.; Case: 1,000 pcs.)

(2) For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

## RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

1) Relay portion (2, 3, 14, 15, 16 and 4, 5, 11, 12, 13 pins) [AQS210TS], (2, 3, 14, 15, 16 pins) [AQS210T2S]

| Item   | Symbol                  | Part No.          |               | Remarks                                     |
|--------|-------------------------|-------------------|---------------|---|
|        |                         | AQS210TS          | AQS210T2S     |   |
| Input  | LED forward current     | I <sub>F</sub>    | 50mA          |   |
|        | LED reverse voltage     | V <sub>R</sub>    | 3V            |   |
|        | Peak forward current    | I <sub>FP</sub>   | 1A            | f=100 Hz, Duty factor=0.1%                  |
|        | Power dissipation       | P <sub>in</sub>   | 75mW          |   |
| Output | Load voltage            | V <sub>L</sub>    | 350V          |   |
|        | Continuous load current | I <sub>L</sub>    | 0.1A (0.12 A) | 0.12A ( ) : in case of using only 1 channel |
|        | Peak load current       | I <sub>peak</sub> | 0.36A         | 100 ms (1 shot), V <sub>L</sub> = DC        |
|        | Power dissipation       | P <sub>out</sub>  | 600mW         | 400mW                                       |

2) Detector portion (6, 7, 9, 10 pins) [AQS210TS], (4, 5, 11, 12 and 6, 7, 9, 10 pins) [AQS210T2S]

| Item   | Symbol               | Part No.          |           | Remarks                      |
|--------|----------------------|-------------------|-----------|------------------------------|
|        |                      | AQS210TS          | AQS210T2S |                              |
| Input  | LED forward current  | I <sub>F</sub>    | 50mA      |                              |
|        | Peak forward current | I <sub>FP</sub>   | 1A        | f = 100 Hz, Duty factor=0.1% |
|        | Power dissipation    | P <sub>in</sub>   | 75mW      |                              |
| Output | Output voltage       | BV <sub>CEO</sub> | 30V       |                              |
|        | Power dissipation    | P <sub>out</sub>  | 150mW     | 100mW                        |

3) Others

| Item                    | Symbol           | Part No.         |                                 | Remarks |
|-------------------------|------------------|------------------|---------------------------------|---------|
|                         |                  | AQS210TS         | AQS210T2S                       |         |
| Total power dissipation | P <sub>T</sub>   | 650mW            |                                 |         |
| I/O isolation voltage   | V <sub>iso</sub> | 1500V AC         |                                 |         |
| Temperature limits      | Operating        | T <sub>opr</sub> | -40°C to +85°C -40°F to +185°F  |         |
|                         | Storage          | T <sub>stg</sub> | -40°C to +100°C -40°F to +212°F |         |

# AQS210TS, 210T2S

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

### 1) Relay portion (2, 3, 14, 15, 16 and 4, 5, 11, 12, 13 pins) [AQS210TS] (2, 3, 14, 15, 16 pins) [AQS210T2S]

| Item                     |                           | Symbol                                | AQS210TS | AQS210T2S          | Condition   |
|--------------------------|---------------------------|---------------------------------------|----------|--------------------|---|
| Input                    | LED operate current       | Typical                               | 0.9mA    |                    | $I_L = \text{Max.}$   |
|                          |                           | Maximum                               | 3mA      |                    |   |
|                          | LED turn off current      | Minimum                               | 0.4mA    |                    | $I_L = \text{Max.}$   |
|                          |                           | Typical                               | 0.8mA    |                    |   |
| LED dropout voltage      | Typical                   | 1.14 (1.25 V at $I_F = 50\text{mA}$ ) |          | $I_F = 5\text{mA}$ |   |
|                          | Maximum                   | 1.5V                                  |          |                    |   |
| Output                   | On resistance             | Typical                               | 17Ω      |                    | $I_F = 5\text{mA}$<br>$I_L = \text{Max.}$<br>Within 1 s on time |
|                          |                           | Maximum                               | 25Ω      |                    |   |
|                          | Off state leakage current | Maximum                               | 1μA      |                    | $I_F = 0$<br>$I_L = \text{Max.}$                                |
| Transfer characteristics | Turn on time*             | Typical                               | 0.23ms   |                    | $I_F = 5\text{mA}$<br>$I_L = \text{Max.}$                       |
|                          |                           | Maximum                               | 1.0 ms   |                    |   |
|                          | Turn off time*            | Typical                               | 0.04ms   |                    | $I_F = 5\text{mA}$<br>$I_L = \text{Max.}$                       |
|                          |                           | Maximum                               | 1.0 ms   |                    |   |

### 2) Detector portion (6, 7, 9, 10 pins) [AQS210TS] (4, 5, 11, 12 and 6, 7, 9, 10 pins) [AQS210T2S]


| Item                     |                           | Symbol                                | AQS210TS | AQS210T2S                                    | Condition  |
|--------------------------|---------------------------|---------------------------------------|----------|--|--|
| Input                    | LED operate current       | Typical                               | 2mA      |  | $I_C = 2\text{mA}$<br>$V_{CE} = 0.5\text{V}$                     |
|                          |                           | Maximum                               | 6mA      |  |  |
|                          | LED turn off current      | Minimum                               | 5μA      |  | $I_C = 1\mu\text{A}$<br>$V_{CE} = 5\text{V}$                     |
|                          |                           | Typical                               | 35μA     |  |  |
| LED dropout voltage      | Typical                   | 1.14 (1.25 V at $I_F = 50\text{mA}$ ) |          | $I_F = 5\text{mA}$                           |  |
|                          | Maximum                   | 1.5V                                  |          |  |  |
| Output                   | Saturation voltage        | Typical                               | 0.08V    |  | $I_F = 15\text{mA}$<br>$I_C = 2\text{mA}$                        |
|                          |                           | Maximum                               | 0.5V     |  |  |
|                          | Off state leakage current | Typical                               | 0.01nA   |  | $I_F = 0$<br>$V_{CE} = 5\text{V}$                                |
|                          |                           | Maximum                               | 500nA    |  |  |
| Current transfer ratio   | Minimum                   | 33%                                   |          | $I_F = 5\text{mA}$<br>$V_{CE} = 0.5\text{V}$ |  |
|                          | Typical                   | 100%                                  |          |  |  |
| Transfer characteristics | Turn on time*             | Typical                               | 0.01ms   |  | $I_F = 5\text{mA}$<br>$V_{CE} = 5\text{V}$<br>$I_C = 2\text{mA}$ |
|                          | Turn off time*            | Typical                               | 0.03ms   |  | $I_F = 5\text{mA}$<br>$V_{CE} = 5\text{V}$<br>$I_C = 2\text{mA}$ |

### 3) Others

| Item                     |                                  | Symbol  | AQS210TS | AQS210T2S | Condition                       |
|--------------------------|----------------------------------|---------|----------|-----------|---------------------------------|
| Transfer characteristics | I/O capacitance                  | Typical | 0.8pF    |           | $f = 1\text{ MHz}$<br>$V_B = 0$ |
|                          |                                  | Maximum | 1.5pF    |           |                                 |
|                          | Initial I/O isolation resistance | Minimum | 1,000MΩ  |           | 500V DC                         |

\*Turn on/Turn off time

For type of connection, see page 34.

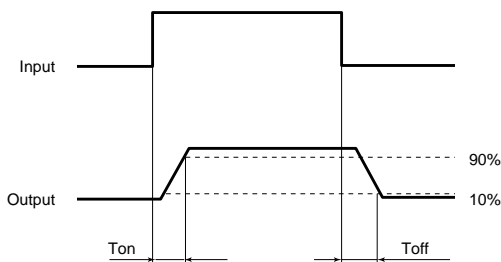


- For Dimensions, see Page 28.
- For Schematic and Wiring Diagrams, see Page 34.
- For Cautions for Use, see Page 36.

REFERENCE DATA

[1] Relay portion (2, 3, 14, 15, 16 and 4, 5, 11, 12, 13 pins) [AQS210TS] (2, 3, 14, 15, 16 pins) [AQS210T2S]


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

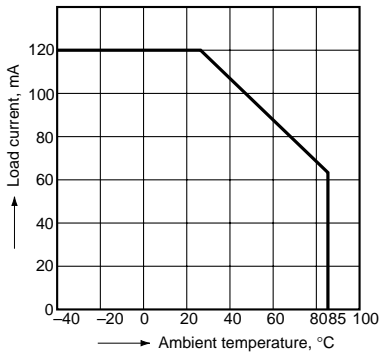


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 14 and 16 (AQS210TS), (AQS210T2S); LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

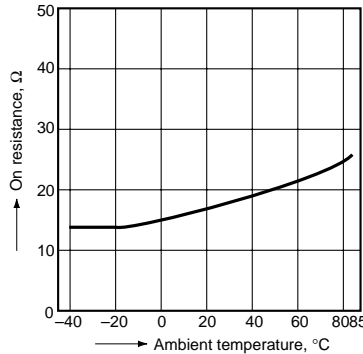


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

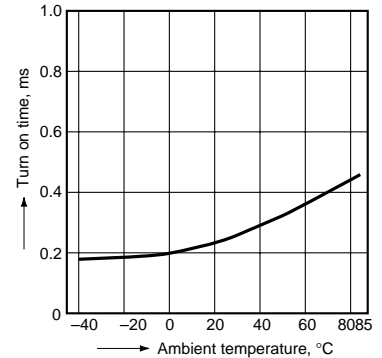


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

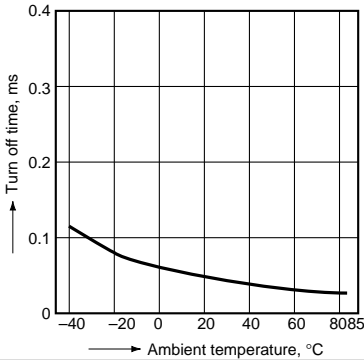


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

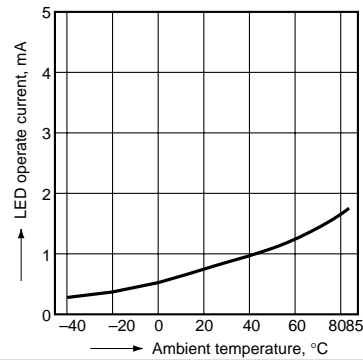


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

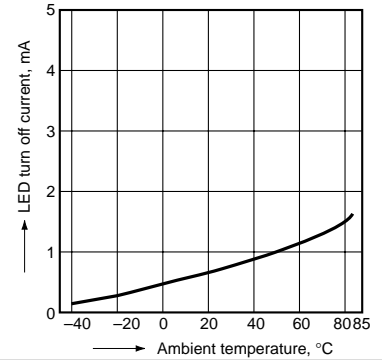


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

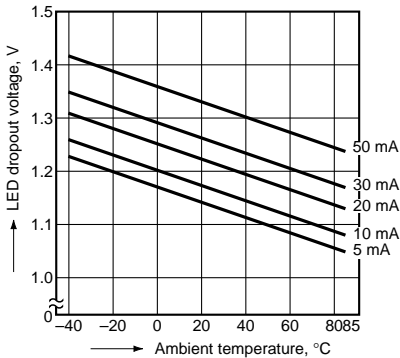


8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 14 and 16 (AQS210TS), (AQS210T2S); Ambient temperature: 25°C 77°F




9. Off state leakage current

Measured portion: between terminals 14 and 16 (AQS210TS), (AQS210T2S); Ambient temperature: 25°C 77°F

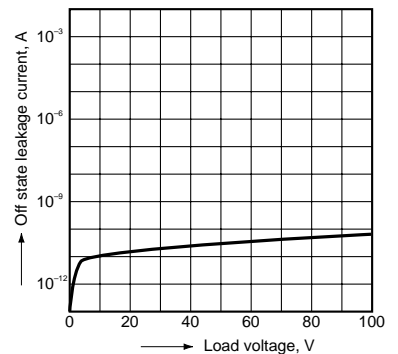


10. LED forward current vs. turn on time characteristics

Measured portion: between terminals 14 and 16 (AQS210TS), (AQS210T2S); Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

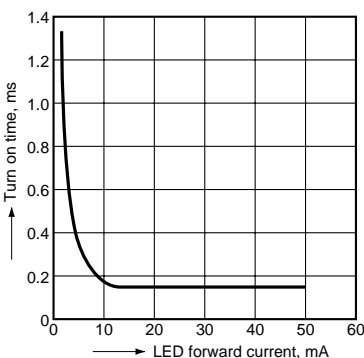


11. LED forward current vs. turn off time characteristics

Measured portion: between terminals 14 and 16 (AQS210TS), (AQS210T2S); Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

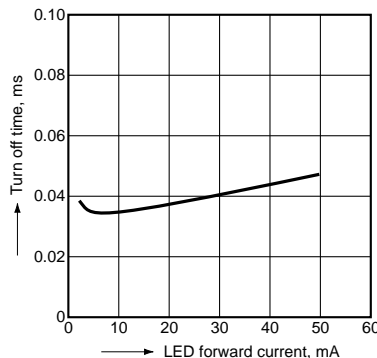

12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 14 and 16 (AQS210TS), (AQS210T2S); Frequency: 1 MHz; Ambient temperature: 25°C 77°F

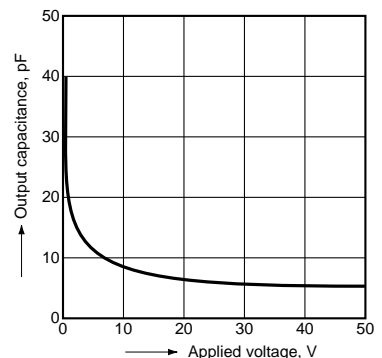


# AQS210TS, 210T2S

## [2] Detector portion (6, 7, 9, 10 pins) [AQS210TS] (4, 5, 11, 12 pins and 6, 7, 9, 10 pins) [AQS210T2S]


1. Output loss vs. ambient temperature characteristics

Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

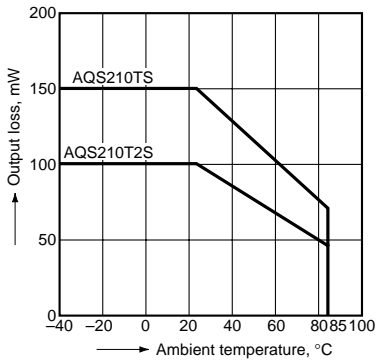


2. Relative output current vs. ambient temperature characteristics

Measured portion: between terminals 6 and 7 (AQS210TS), (AQS210T2S)  
 $I_F = 5\text{ mA}$ ,  $V_{CE} = 0.5\text{ V DC}$

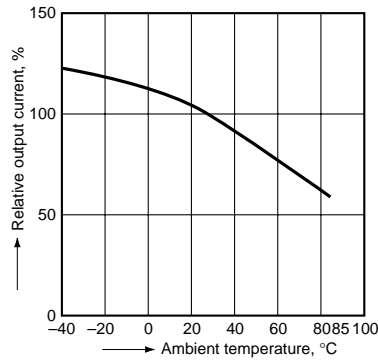


3. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

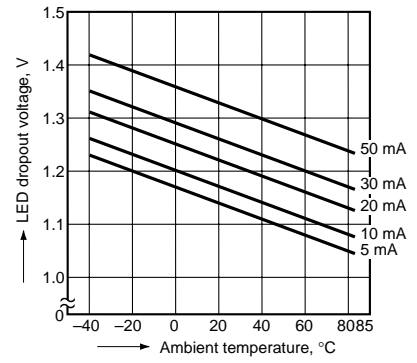


4-1. Collector current vs. voltage between collector and emitter characteristics ( $I_C$ - $V_{CE}$ )

Measured portion: between terminals 6 and 7 (AQS210TS), (AQS210T2S)  
 Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$

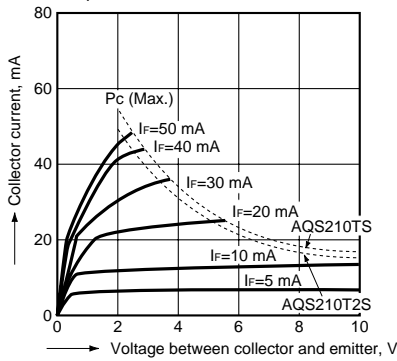

4-2. Collector current vs. voltage between collector and emitter characteristics ( $I_C$ - $V_{CE}$ )

Measured portion: between terminals 6 and 7 (AQS210TS), (AQS210T2S)  
 Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$

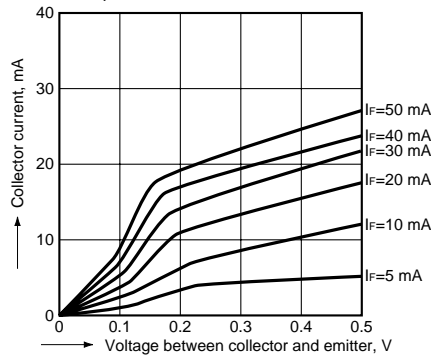

5. Off state leakage current

Measured portion: between terminals 6 and 7 (AQS210TS), (AQS210T2S)  
 $I_F = 0\text{ mA}$   
 $T_a = 25^{\circ}\text{C}$   $77^{\circ}\text{F}$

